


## EXA-02



FLOW PROPORTIONAL  
DOSING UPTO 2%



SUITABLE FOR  
NUTRIENTS DOSING



COMPACT & STURD  
DESIGN



SUITABLE FOR  
OUTDOOR MOUNTING

From the makers of popular

 pumps





## Technical Specifications

Min. Dosing Flow	-	1 lph
Max. Dosing Flow	-	30 lph
Min. Actuation Pressure	-	0.3 bar
Max. Actuation Pressure	-	5.0 bar
Pressure loss at max. flow	-	1.2 bar
Max. operating temperature	-	50 C
Inlet/Outlet Connections	-	3/4" BSPM
Dosing externally adjustable	-	0.5 to 2 %

## Scope Of Supply

- Dosamatic Doser
- Wall/Tank Mounting Brackets
- Suction tubing with foot valve and filter.
- 3/4" hose adaptors
- Spares kit
- 'O & M' Manual

## Examples Of Installation

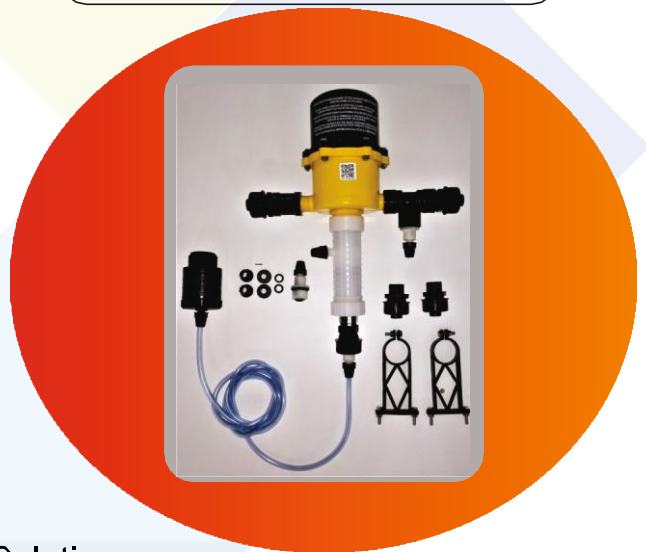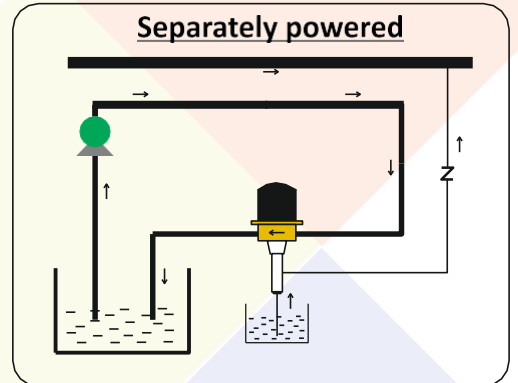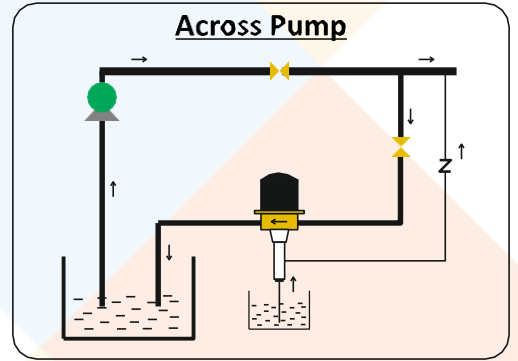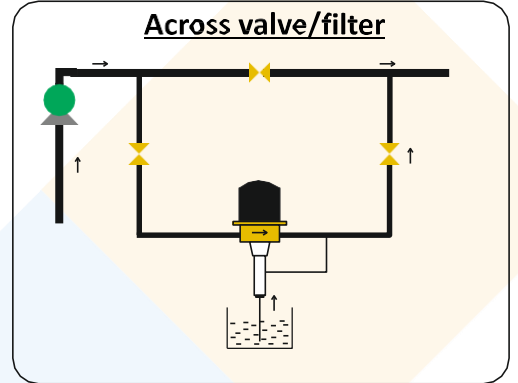

An INITIATIVE Product  
ENGINEERING

Available with Your Trusted Partner for Water Treatment Solutions:

