


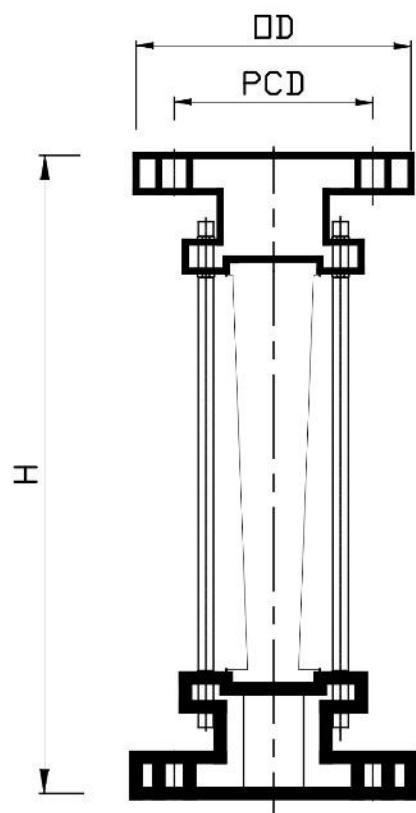

TECHNICAL DIMENSIONS

MODEL	BSTD FL	OD	PCD	H
F1200	25NB	114	82.6	300
F2400	25NB	114	82.6	300
F9000L	40NB	133	98.4	300
F12000	40NB	133	98.4	300
F15000	50NB	152	114	300
F20000	65NB	165	127	500

Specification:-

1. Material :

- i) Float : SS316
- ii) Body : PolyCarbonate
- iii) Flange : PP
- iv) Oring : Nitryl Rubber

2. Technical:

- i) Accuracy : $\pm 2\%$ FSD
- ii) Max Temp : 60°C
- iii) Max Pressure : $5\text{kg}/\text{cm}^2$
- iv) Pressure drop : $0.3\text{kg}/\text{cm}^2$
(at Max flow)


REV	DATE	Revision Note	Reason For Change Rev.	Chck.	Sign
00					

ASTER
TECHNOLOGIES

Part Name:-

BSTD FL ROTAMETER GA DRG

Scale:- 1:1



DONE- R.B

CHD.- K.K

APRVD:- P.M

ALL DIMENSIONS ARE IN MM.